

# Generators Water Pumps Power Carriers





Images for illustration purposes only.

# When we designed our range of industrial products we looked at your life from every angle.

Over 30 years of innovation, testing and refining has given our industrial products a global reputation for reliability and efficiency. In fact, everything we learn from everything we do goes into their development, allowing us to create new technologies and new ways of solving problems. So it's not just clever engineering, it's **ENGINEERING FOR** *Life*

## CONTENTS

### GENERATORS

- 03 | How to choose your generator
- 05 | Honda generator benefits
- 07 | Generator key features
- 09 | Inverter series
- 13 | Open frame series
- 15 | Specialist open frame series
- 19 | Generator specification

### WATER PUMPS

- 23 | Honda water pump benefits
- 25 | Water pump key features
- 27 | Water pumps - lightweight & high pressure performance
- 29 | Water pumps - high flow rate & chemical
- 31 | Water pumps - trash pumps
- 33 | Water pump specification



























































































































































### POWER CARRIERS

- 35 | Power carriers
- 37 | World of Honda Power Equipment



# How to choose your generator

To determine which Honda generator is best suited to your application, refer to the individual appliance data plate for actual power specifications. See the chart below for a quick reference guide to typical applications, or talk to your local Honda authorised dealer who will be happy to help.

				INVERTER SERIES				
				INVERTER	INVERTER	INVERTER	INVERTER	INVERTER
Continuous power (W)				900	1800	2600	2800	5500
Sound power level (2000/14/EC, 2005/88/EC)				87	90	92	91	91
Typical Applications*		Application Continuous Rating (W)**	Indicative Start-up Load (W)**	EU 10i	EU 22i	EU 30i	EU 30is	EU 70is
CAMPING - CARAVANNING LEISURE	Portable TV	250	-					
	Portable Fridge	110+	300+					
	Travel Kettle	650+	-					
	Hair Dryer	1000+	-					
	Portable Microwave	600+	1600+					
	Portable Fan	40+	100+					
	Laptop/PC	20+	100+					
	Portable Heater	1500+	-					
	Caravan Air Conditioner	2600+	-					
	Battery Charging	100+	-					
GARDEN	Lawnmower	1100+	2500+					
	Strimmer	350+	1000+					
	Hedge trimmer	500+	1200+					
	Shredder	2000+	2600+					
	Garden Vac/Blower	2000+	2600+					
	Chainsaw	1800+	2600+					
	Pressure Washer	2100+	3000+					
HOME / OFFICE BACK UP	Fridge/Freezer	500+	1500+					
	Central Heating Pump	300+	500+					
	Plasma TV	300+	900+					
	Desktop Computer	320+	700+					
	Computer Printer	150+	-					
	Photocopier Machine	1600+	1800+					
	Portable Air Conditioner	3000+	5000+					
PROFESSIONAL	Jigsaw	400+	1100+					
	Compressor	2000+	6000+					
	Welder	3500+	5500+					
	Concrete Mixer	850+	2975+					
	Submersible Pump	500+	-					
	Hammer Drill	800+	-					
	Table Saw	1500+	3000+					
	Angle Grinder	900+	-					
	Industrial Fan/Blower	2000+	-					
	Concrete Breaker	850+	2500+					
	Circular Saw	1500+	-					
LIGHTING	Candescent	25+	-					
	Halogen Spotlights Domestic	75+	-					
	Fluorescent	8-100	-					
	Energy Saving Bulb	12-33	-					
	Professional Tungsten	100+	-					
	Halogen Spotlights	150-500	-					

\*When powering multiple applications ensure that the total power required does not exceed the generators rated output (please consider both running loads and start up loads).



### SOUND LEVEL

## OPEN FRAME SERIES 3-PHASE ▲

60	Normal speech
70	Vacuum cleaner
80	Inside a car at 50 mph

\*\*Typically the lowest power requirement, however many applications will require more power. Please check with your specific application to ensure generator compatibility.

# Honda generator benefits



## Keep it 100% Honda

Honda generators have an enviable reputation throughout the world, they are trusted to work wherever and whenever they are needed. Every part of our generators, including our legendary engines, has been designed and built to be as robust and reliable as possible. So wherever you are, campsite, building site, outdoor event or at home, you can rely on your Honda generator to provide you with the power you need, just when you need it.

Every Honda generator is backed up by an extensive network of Honda Power Equipment dealers, who will always be happy to provide more information or advice.

## Inverter innovation

Honda were first to develop generators with the ability to power sensitive electronics. Our Inverter technology regulates surges of raw power and evens them out to the same high quality electricity as outlets from your home. Our Inverter range can produce 1000 W to 7000 W of portable power, enough to run anything from a laptop to a cottage.

## Quiet running

We have gone to great lengths to make sure our portable generators are as quiet and unobtrusive as possible. Which is why they feature our exhaust and muffler technology, giving them exceptionally low noise ratings.



## Choose your accessories

A full range of accessories are available for all our generators, from a protective cover, wheels kit, parallel cable and battery tenders. Some units, like our EU 70is and EM 4500/5500, can also be equipped with an APC Universal Transfer Switch, which automatically manages your home's power, switching it from utility to generator as needed (after blackout from storm or huge snow fall for instance).

## Honda 4-Stroke

Our powerful 4-Stroke engines are remarkably fuel efficient and reliable, which means fewer fill-ups and reduced maintenance costs throughout their working life. With lower emissions and lower noise levels than standard 2-Stroke engines, they give a cleaner, more efficient and quieter working environment.

# Generator key features

We have created a series of icons to represent our innovations, features and technologies. They can be found throughout the brochure making it easy for you to compare models and choose the right generator.

## PERFORMANCE



### Lightweight

For superb portability in any situation, with easy transportation and storage.



### Super-Quiet

Noise-reducing casing and acoustic panelling to greatly reduce operational noise.



### DC Output

Provides up to 12A for battery charging (optional cable required).



### Eco-Throttle™

Automatically adjusts the engine speed to precisely match the load, to save fuel, extend engine life and give quieter operation.



### Oil Alert™

Prevents engine damage by automatically shutting the unit down if the oil drops below a safe operating level.



### Transport Wheels

Smooth and stable wheel attachments allow a single user to easily manoeuvre the unit.



### Electric Start

Key operated electric start for effortless operation.



### Fuel Injection Engine

A world first for small generators. The fuel injection system improves starting, increases efficiency and reduces emissions.



### i-Monitor

Monitors output performance as well as self-diagnostics and servicing information.



### Enhanced Anti-Vibration System

Our 45° inclined rubber engine mounts give superior vibration damping compared to industry-standard straight rubber mounts.



### Extended Run Time

Model features a larger fuel tank for longer continuous operation.



### 3-Phase Power Output

Variable power output options for single-phase or three-phase applications.



### Auto-Choke

The intelligent auto-choke system automatically sets the choke to give optimum starting and running in all conditions.



### Auto Throttle

Automatically reduces the engine speed when appliances are turned off or disconnected. Engine returns to rated speed when appliances are turned on or reconnected.



### High Dust and Water Protection

Model features a high level of dust and water protection (IP54 category compared to the standard IP23 category).



### Parallel Operation

Parallel Operation capability is an additional benefit of Inverter technology. Using Honda Genuine Parallel Operation cables, you can link two generators together to get as much as double the output of a single unit. This gives you extra power when you need it, without having to trade up to a larger, heavier generator. Note: you can only parallel link two identical units together.

# The right power output for the job

Whatever load you are plugging in, a high quality electricity output will enhance the lifetime of your application. Reactive loads will require very high quality electricity for better performance. Electronic loads could even fail if the electricity quality is not high enough. To achieve high quality electricity output, you need good regulation of voltage and power. There are several different technology types available to regulate the voltage and power on a generator, each with different advantages:




## Condenser/Inductive

Condenser or inductive generators are the most popular in the industry. The simplicity of technology makes these generators cost effective and reliable. Ideally suited for applications with resistive loads.



## Intelligent Auto Voltage Regulator (i-AVR)

By combining Honda's D-AVR with engines equipped with i-Governor (Electronic Governor), Honda has produced a range of generators offering class leading output performance with stable voltage and frequency. Ideal for construction, hospitality, emergency services, home back up and sensitive applications.



## AVR


Many Honda generators feature an Automatic Voltage Regulator, or AVR, designed to consistently control voltage. Power regulation is electronically controlled, which allows for better voltage and frequency stability. The AVR helps keep the output voltage more constant and less dependent on the load.

This means less drop in power or power spikes. AVR technology significantly enhances the performance and operating lifetime of reactive load applications.



## Cyclo Converter

Honda's patented Cyclo Converter technology is based on Inverter technology, but uses a simplified electronic voltage control system. Cyclo Converter generators are compact and lightweight, giving higher quality electricity than AVR generators, as the electricity output is not directly linked to the engine rpm. These generators are ideal for both industrial and leisure applications.



## Digital AVR

Digital Automatic Voltage Regulator (D-AVR) has a significant advantage over the traditional AVR, giving a smoother and more efficient output. This new output technology has several application benefits over AVR, such as minimising flickering lights.



## Inverter

Inverter generators, pioneered by Honda back in 1987, give high quality clean power and are not rpm dependent. The cutting-edge technology allows for an exceptionally compact product, with an alternator almost half the size of more traditional generators. Ideal for powering highly sensitive electronic equipment, such as computers, Inverters provide optimised electricity for reactive loads and electronic loads, ensuring the best application performance and product longevity. Inverter generators offer a number of other benefits, including less noise, lower weight, and greater fuel efficiency when compared to traditional models.



## Inverter series



## Power to Go

**Compact and quiet, with the ability to power even the most sensitive electronic equipment, our Inverter range is trusted by professional and private users throughout the world.**

EU 10i



EU 22i



EU 30i

### Lightweight

Ultra-lightweight materials such as magnesium are used in our compact range, enabling power to be accessed in the remotest places. An integral and ergonomically designed handle allows them to be easily carried, whilst the EU 30i features a foldable handle, which offers unrivalled mobility for a 3000 W generator.

### Comfortable

Ultra-quiet, our portable range have specially designed acoustically insulated casings and an advanced exhaust muffler system, which drastically reduces noise. Low fuel consumption, on the other hand,

not only makes our compact range highly cost effective, it ensures longer working times without the need for refuelling.

### Reliable

Robust, sturdy and reliable, our compact EU generators are easy to start and restart, always ready with power exactly where you need it. They are unique in their ability to deal with surges in power demand, thanks to their Inverter technology, essential for use with sensitive electronic devices.

Lightweight

Oil Alert™

Transport Wheels\*

DC Output

Super-Quiet

Eco-Throttle™

Parallel Operation

x2

\*EU 30i model only.



Parallel Operation allows two generators to be linked to double the output of a single unit



Portability allows for easy transport and storage

SPECIFICATION



EU 10i INVERTER	EU 22i INVERTER	EU 30i INVERTER
MAX OUTPUT	MAX OUTPUT	MAX OUTPUT
1000 W	2200 W	3000 W
ENGINE	ENGINE	ENGINE
GXH 50	GXR 120	GX 160
STARTER SYSTEM	STARTER SYSTEM	STARTER SYSTEM
Recoil	Recoil	Recoil
WEIGHT	WEIGHT	WEIGHT
13.0kg	21.1kg	35.2kg

Model availability is dependant on country, do not hesitate to ask your local Honda dealer.

# Inverter series



## SPECIFICATION

EU 30is INVERTER	EU 70is INVERTER
	
MAX OUTPUT	MAX OUTPUT
3000 W	7000 W
ENGINE	ENGINE
GX 200	GX 390
STARTER SYSTEM	STARTER SYSTEM
Electric	Electric
WEIGHT	WEIGHT
61.2kg	118.1kg




Press the button to start the engine

Easy manoeuvrability means 118kg has never been so easy to move

\*EU 70is models only.  
\*\*EU 30is models only.

Fuel Injection  
Engine\*



i-Monitor\*



Auto-  
Choke\*\*



DC Output\*\*



Oil Alert™



Transport  
Wheels



Super-Quiet



Electric  
Start



Eco-  
Throttle™



Parallel  
Operation



## High power on demand

Perfect for home/office back up or outdoor events, these models can operate a wide variety of appliances with a high quality, clean electricity supply.

EU 30is



EU 70is



### Compact high performance

The Honda GX engine generates strong, stable and clean power thanks to our unique Honda Inverter technology. The range is also extremely manoeuvrable, with well positioned handles and tough wheels.

### Fuel Injected EU 70is

The EU 70is is the only Inverter generator equipped with a fuel injection engine, which provides better fuel efficiency, easy starting, lower maintenance and the same level of performance even if used at altitude.

### Comfort

These Inverter generators may be powerful, but with Honda's exhaust and muffler technology, they are also extremely quiet. A large fuel tank combined with our fuel efficient engine, allows more than 6 hours of uninterrupted running time, even under high power. Both models feature electric start and a fuel gauge as standard.

Images for illustration purposes only.  
Model availability is dependant on country, do not hesitate to ask your local Honda dealer.

## Open frame series



### SPECIFICATION

EM 2300 AVR	EC 3600 CONDENSER	EC 5000 CONDENSER	ECT 7000 <sup>A</sup> INDUCTIVE
MAX OUTPUT	MAX OUTPUT	MAX OUTPUT	MAX OUTPUT
<b>2300 W</b>	<b>3600 W</b>	<b>5000 W</b>	<b>7000 W</b> 3-Phase
ENGINE	ENGINE	ENGINE	ENGINE
<b>GX 160</b>	<b>GX 270</b>	<b>GX 390</b>	<b>GX 390</b>
STARTER SYSTEM	STARTER SYSTEM	STARTER SYSTEM	STARTER SYSTEM
<b>Recoil</b>	<b>Recoil</b>	<b>Recoil</b>	<b>Recoil</b>
WEIGHT	WEIGHT	WEIGHT	WEIGHT
<b>40.0kg</b>	<b>58.0kg</b>	<b>75.0kg</b>	<b>77.0kg</b>


EM 2300



EC 3600



ECT 7000



EC 5000



ECMT 7000



<sup>A</sup>Also available with AVR output technology (ECT 7000 P) and larger fuel tank + wheel kit (ECMT 7000).

Images for illustration purposes only.

Model availability is dependant on country, do not hesitate to ask your local Honda dealer.

Oil Alert™

Transport  
Wheels\*Enhanced  
Anti-Vibration  
System3-Phase  
Power  
Output\*\*High Dust  
and Water  
Protection\*\*\*Extended  
Run Time\*

\*Optional wheel kit available.  
 \*\*ECT 7000 and ECMT 7000 models only.  
 \*\*\*ECT 7000 P model only.  
 \*ECT 7000 model only.



## Ready for work

EC generators are tireless workhorses – made tough for tough environments and the first choice for heavy outdoor use and hire companies.



Comfort is ensured by our specific Honda enhanced anti vibration system



All EC generators are fitted with an Oil Alert™ system

### Sturdiness

Our EC generators are robust, dependable and require minimal maintenance. They are powered by our easy-starting, commercial grade, 4-Stroke GX engines and protected by a super-strong steel frame, ready to deal with the harsh conditions of a work site. An optional wheel kit is available to improve mobility.

### Comfort and regulation compliant

The engines are mounted onto our unique rubber shock absorbers, which are positioned either side of the engine at 45°, significantly reducing the engine vibration of an already quiet machine. All our generators respect the tightest European regulations for noise, emissions and insulation and are trusted by professionals around the world.

### 3-Phase power output generator

Honda 3-Phase generators supply a constant level of power which is ideal for use with resistive loads like compressors, welders or concrete breakers. The ECT 7000 is available in different versions: ECMT 7000 which features a bigger fuel tank to maximise working time, and a wheel kit, and ECT 7000 P which offers AVR current quality and a higher resistance to water and dust (IP 54).




### New EM 2300 AVR generator

The new EM 2300 generator is for general construction use. It offers a very good voltage and frequency stability through AVR technology and features Oil Alert™ and extended run time (more than 9h 40). To match with professional needs, the machine is fitted with an hour meter for when the next service is due.

Specialist  
open frame  
series




SPECIFICATION

EG 3600CL DIGITAL AVR	EG 4500CL DIGITAL AVR	EG 5500CL DIGITAL AVR
		
MAX OUTPUT	MAX OUTPUT	MAX OUTPUT
3600 W	4500 W	5500 W
ENGINE	ENGINE	ENGINE
GX 270	GX 390	GX 390
STARTER SYSTEM	STARTER SYSTEM	STARTER SYSTEM
Recoil	Recoil	Recoil
WEIGHT	WEIGHT	WEIGHT
68.0kg	79.5kg	82.5kg

Images for illustration purposes only.  
Model availability is dependant on country, do not hesitate to ask your local Honda dealer.



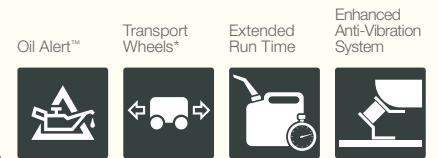

\*Optional wheel kit available.



## Long run generators

**Perfect for the most demanding commercial and rental applications, the EG range has been designed and built for professional use to deliver robust, reliable, efficient power.**



*The EG range is equipped with a high capacity fuel tank for extended run time*



*The exclusive Honda D-AVR technology provides cleaner electricity*

### Reliable

The EG range features our efficient GX engine with low emissions and an extended capacity fuel tank. They offer an exceptionally long running time of about 12 hours, enough to cover a full day of hard work. Even after long periods of storage, the EG generators are easy to start and are protected from the toughest environments by a tough steel frame.

### Honda D-AVR technology

These generators produce a consistent and stable output of clean power. This comes courtesy of Honda's highly advanced D-AVR (Digital Auto Voltage Regulator) which uses a microcomputer to precisely

control output voltage. It not only improves the performance of reactive type loads, but maximises product's working life.

### Comfortable

To minimise vibration, we have built an engine mount system into the frame. These unique Honda rubber shock absorbers are positioned either side of the engine at 45° and significantly reduce the engine vibration. To aid transportation and manoeuvrability an optional wheel kit is also available.

## Specialist open frame series



### SPECIFICATION

EM 30 CYCLO CONVERTER	EM 4500CXS i-AVR	EM 5500CXS i-AVR
MAX OUTPUT	MAX OUTPUT	MAX OUTPUT
3000 W	4500 W	5500 W
ENGINE	ENGINE	ENGINE
GX 200	iGX 390	iGX 390
STARTER SYSTEM	STARTER SYSTEM	STARTER SYSTEM
Recoil	Electric	Electric
WEIGHT	WEIGHT	WEIGHT
32.0kg	106.5kg	108.8kg

Images for illustration purposes only.  
Model availability is dependant on country, do not hesitate to ask your local Honda dealer.



Enhanced  
Anti-Vibration  
System



Auto  
Throttle\*



Auto-  
Choke\*\*



Electric  
Start\*\*



Oil Alert™



Transport  
Wheels\*\*



Extended  
Run Time\*\*



DC  
Output\*\*\*



\*EM 30 only.  
\*\*EM 4500CXS and EM 5500CXS models only.  
\*\*\*EM 4500CXS only.



## Intelligent energy

**These professional generators produce a clean electricity output that can be used for a wide range of sensitive electrical applications, including construction, hospitality, emergency and home back up.**

### High quality clean power

The EM 4500CXS and EM 5500CXS supply power through the Honda intelligent Auto Voltage Regulator (i-AVR). It ensures a constant voltage output and reacts to any fluctuations in load, no matter how heavy.

### Comfortable usage

The EM 4500CXS and EM 5500CXS units feature our Honda Auto-Throttle, which is a unique load-sensing device that detects when the load increases, whilst quietly and instantly increasing the revs to match, without you experiencing any drop in power. And when the demand drops the revs will decrease, saving you fuel and money. They also

come with electric start and transport wheels as standard. The EM 4500CXS and EM 5500CXS can be equipped with an APC Universal Transfer Switch, which automatically manages your home's power, switching it from utility to generator as needed.

### Compact and smart EM 30

The EM 30's lightweight and rugged no-nonsense design allows for easy transportation, with the unit weighing in at only 32kg. It delivers a stable wave of clean electricity through our Cyclo Converter technology, making it ideal for hospital emergency work and sensitive lighting.



*Clear and intuitive control panels, including electric start system*



*The EM 5500CXS can supply up to 5500W through high quality current*

# Generator specification

Use our handy table to compare our generators and choose the right model for you.

INVERTER SERIES					
	EU 10i	EU 22i	EU 30i	EU 30is	EU 70is
					
OUTPUT TECHNOLOGY	INVERTER	INVERTER	INVERTER	INVERTER	INVERTER
Type	Single phase	Single phase	Single phase	Single phase	Single phase
Maximum output (W)	1000	2200	3000	3000	7000
Rated output (W)	900	1800	2600	2800	5500
Rated voltage (V)	230	230	230	230	230
Rated frequency (Hz)	50	50	50	50	50
Rated current (A)	3.9	7.8	11.3	12.2	23.9
DC rated output	12V/8.0A	12V/8.3A	12V/8.3A	12V/12A	-
Engine model	GXH50	GXR120	GX160	GX200	GX390
Engine type	4-Stroke, OHV**, 1 cylinder	4-Stroke, OHV**, 1 cylinder	4-Stroke, OHV**, 1 cylinder	4-Stroke, OHV**, 1 cylinder	4-Stroke, OHV**, 1 cylinder
Displacement (cm³)	49.4	121.0	163.0	196.0	389.0
Bore × stroke (mm)	41.8 × 36.0	60.0 × 43.0	68.0 × 45.0	68.0 × 54.0	88.0 × 64.0
Engine speed (rpm)	4500 max	4500 max	4000 max	3800 max	3600 max
Cooling system	Forced air	Forced air	Forced air	Forced air	Forced air
Ignition system	Transistor	Transistor	Transistor	Transistor	Transistor
Oil capacity (L)	0.25	0.40	0.53	0.55	1.10
Fuel tank capacity (L)	2.1	3.6	5.9	13.0	19.2
Operating time at rated	3h 54	3h 35	3h 50	8h	6h 30
Starter system	Recoil	Recoil	Recoil	Recoil and electric start	Recoil and electric start
Length (mm)	451	512	622	658	Handle down: 848 Handle up: 1,198
Width (mm)	242	290	379	482	700
Height (mm)	379	425	489	570	721
Dry weight (kg)	13.0	21.1	35.2	61.2	118.1
Sound pressure level at workstation – dB(A) (98/37/EC, 2006/42/EC)	70	72	74	74	75
Guaranteed sound power level – dB(A) (2000/14/EC, 2005/88/EC)	87	90	92	91	91

\*Three phase 400 V3-.

\*\*OHV – Overhead Valve.

Note: all the generators run on unleaded petrol.



## OPEN FRAME SERIES

**EM 2300**



**EC 3600**



**EC 5000**



**ECT 7000**



**ECMT 7000**



**ECT 7000 P**



AVR	CONDENSER	CONDENSER	INDUCTIVE	INDUCTIVE	AVR
Single phase	Single phase	Single phase	Single/3-Phase	Single/3-Phase	Single/3-Phase
2300	3600	5000	4000/7000*	4000/7000*	4000/7000*
2000	3400	4500	3600/6500*	3600/6500*	3600/6500*
230	230	230	230/400*	230/400*	230/400*
50	50	50	50	50	50
8.7	15.0	19.5	16.0/9.5*	16.0/9.5*	16.0/9.5*
-	-	-	-	-	-
GX160	GX270T	GX390T1	GX390T1	GX390	GX390T1
4-Stroke, OHV**, 1 cylinder	4-Stroke, OHV**, 1 cylinder	4-Stroke, OHV**, 1 cylinder	4-Stroke, OHV**, 1 cylinder	4-Stroke, OHV**, 1 cylinder	4-Stroke, OHV**, 1 cylinder
163.0	270.0	389.0	389.0	389.0	389.0
68.0 × 45.0	77.0 × 58.0	88.0 × 64.0	88.0 × 64.0	88.0 × 64.0	88.0 × 64.0
3000	3000	3000	3000	3000	3000
Forced air	Forced air	Forced air	Forced air	Forced air	Forced air
Transistor	Transistor	Transistor	Transistor	Transistor	Transistor
0.58	1.10	1.10	1.10	1.10	1.10
12.0	5.3	6.2	6.2	22.8	6.2
9h 45	2h 25	2h 15	2h 10	8h 45	2h 10
Recoil	Recoil	Recoil	Recoil	Recoil	Recoil
535	800	800	800	755	800
435	550	550	550	550	550
450	540	540	540	560	540
40.0	58.0	75.0	77.0	104.0	77.0
79	85	87	86	85	86
94	97	97	97	97	97

Images for illustration purposes only.

# Generator specification

Use our handy table to compare our generators and choose the right model for you.

## SPECIALIST OPEN FRAME SERIES

### EG 3600CL



### EG 4500CL



### EG 5500CL



#### OUTPUT TECHNOLOGY

	D-AVR	D-AVR	D-AVR
Type	Single phase	Single phase	Single phase
Maximum output (W)	3600	4500	5500
Rated output (W)	3200	4000	5000
Rated voltage (V)	230	230	230
Rated frequency (Hz)	50	50	50
Rated current (A)	13.9	17.4	21.7
DC rated output	-	-	-
Engine model	GX270T2	GX390T2	GX390T2
Engine type	4-Stroke, OHV*, 1 cylinder	4-Stroke, OHV*, 1 cylinder	4-Stroke, OHV*, 1 cylinder
Displacement (cm³)	270	389	389
Bore × stroke (mm)	77.0 × 58.0	88.0 × 64.0	88.0 × 64.0
Engine speed (rpm)	3000	3000	3000
Cooling system	Forced air	Forced air	Forced air
Ignition system	Transistor	Transistor	Transistor
Oil capacity (L)	1.10	1.10	1.10
Fuel tank capacity (L)	24.0	24.0	24.0
Operating time at rated	12h	9h 30	8h 10
Starter system	Recoil	Recoil	Recoil
Length (mm)	681	681	681
Width (mm)	530	530	530
Height (mm)	571	571	571
Dry weight (kg)	68.0	79.5	82.5
Sound pressure level at workstation – dB(A) (98/37/EC, 2006/42/EC)	79	81	82
Guaranteed sound power level – dB(A) (2000/14/EC, 2005/88/EC)	96	97	97

\*OHV – Overhead Valve.

Note: all the generators run on unleaded petrol.



## SPECIALIST OPEN FRAME SERIES

**EM 30**



**EM 4500CXS**



**EM 5500CXS**



CYCLO CONVERTER	i-AVR	i-AVR
Single phase	Single phase	Single phase
3000	4500	5500
2600	4000	5000
230	230	230
50	50	50
11.4	17.4	21.7
12V/12A	-	-
GX200	i-GX390	i-GX390
4-Stroke, OHV*, 1 cylinder	4-Stroke, OHV*, 1 cylinder	4-Stroke, OHV*, 1 cylinder
196	389	389
68.0 × 54.0	88.0 × 64.0	88.0 × 64.0
3600 max	3000	3000
Forced air	Forced air	Forced air
Transistor	Transistor	Transistor
0.55	1.10	1.10
9.7	23.5	23.5
6h	9h 10	8h
Recoil	Recoil and electric start	Recoil and electric start
445	Handle down: 725 Handle up: 1,047.5	Handle down: 725 Handle up: 1,047.5
402	706	706
480	719	719
32.0	106.5	108.8
79	77	77
96	96	96



# Honda water pump benefits



## Keep it 100% Honda

Honda water pumps are built to the very highest standards and feature many high-tech innovations developed over more than 20 years of experience. They also have the unique advantage of being powered by a Honda engine, which has an enviable reputation throughout the world, backed up by a network of specialist Honda Power Equipment dealers. The result is unprecedented performance and expert care across a complete line-up of water pumps, to assist you with everything from garden irrigation and pool maintenance to heavy-duty drainage work.

## Reliable quality designed for you

We have designed a whole range of reliable and durable water pumps to make sure there is one to meet your needs. From transfer and trash to high-pressure pumps, all are built to provide you with the best possible performance.

## Superb performance

Honda water pumps adhere to the highest standards of quality in every aspect of their design. Rugged, cast-iron impellers and mechanical seals ensure years of reliable service.



## Honda 4-Stroke

Our innovative and powerful 4-Stroke engine technology has many advantages, their lower noise and emissions, for example. Compared to 2-Stroke engines they give a cleaner and quieter working environment. They are also remarkably fuel efficient, which means fewer fill-ups and reduced ownership costs.

## Built to last under pressure

The Honda WMP 20 water pump model has been specially developed to deal with corrosive fluids such as salted water, chemicals and fertilisers. Very specific materials have been selected for the volute and impeller to ensure a long working life.

# Water pump key features

Honda water pumps have many innovative features and technologies. The following icons have been carefully considered to support you in choosing the right water pump for your needs. Look for these symbols on the following model pages.

## PERFORMANCE



### OHV 4-Stroke Engine

Powerful and efficient with trusted reliability. Easy starting in all conditions with automatic decompression to reduce the pull force required.



### Unique 360° Operation

Allows the pump to operate or be stored at any incline without damage.



### Lightweight

Super-compact and lightweight with integral carry handle for easy transporting and storage.



### Chemical Pump

Suitable for pumping chemical products such as agricultural fertiliser or industrial chemicals.



### Oil Alert™

Prevents engine damage by automatically shutting the unit down if the oil drops below a safe operating level.



### Cast Iron Volute and Impeller

Superior durability for long life performance, even when pumping abrasive silts.



### Conical Impeller

Superb pumping and priming performance with reduced wear and clogging.



### High-Efficiency Impeller

Unique Honda design results in optimal flow and efficiency.



### Anti-Vibration System

Straight engine rubber mounts to reduce mechanical stress on the entire unit.



### Enhanced Anti-Vibration System

45° inclined rubber engine mounts for superior vibration damping at high engine rpm.



### Removable Inspection Cover

Quick and simple access for making inspections and clearing debris for reduced downtime.



Type	Lightweight		High Pressure		High Flow		Chemical	Trash		
Model	WX 10	WX 15	WH 15	WH 20	WB 20	WB 30	WMP 20	WT 20	WT 30	WT 40
Clean water	•	•	•	•	•	•	•	•	•	•
Muddy water	•	•			•	•		•	•	•
Solids up to 3mm	•	•	•	•	•	•	•	•	•	•
Solids up to 6mm					•	•		•	•	•
Solids up to 24mm								•	•	•
Solids up to 28mm									•	•
Solids up to 31mm										•
Chemicals							•			

# Water pump terminology

Below is more information on some of the additional terminology used in the description of water pump specifications, technology and operation:

## Pressure

Pressure is force per unit area, usually listed in bar, and is often included in pump performance curves. Pressure and head are directly related when referring to water pump performance. The pressure exerted (in bar) at the base of a column of water is  $0,098 \times \text{HEAD}$  (in metres). If you attach a pressure gauge at the base of a 30m pipe filled with clear water, you would measure 2,94 bar. Notice how the diameter of the pipe doesn't affect the pressure value. The maximum pressure (at zero discharge) of any water pump can be determined by multiplying the maximum head by 0,098.

## Impeller

An impeller is a rotating disk containing vanes coupled to the engine's crankshaft. All centrifugal pumps contain an impeller. The impeller vanes sling liquid outward through centrifugal force, causing a pressure change. This pressure change results in liquid flowing through the pump.

## Volute

The volute is the stationary housing enclosing the impeller. The volute collects and directs the flow of liquid from the impeller and increases the pressure of the high velocity water flowing from the vanes of the impeller.

## Mechanical Seal


This is a spring-loaded seal consisting of several parts that seal the rotating impeller in the water pump case, preventing water from leaking into and damaging the engine. Mechanical seals are subject to wear when pumping water containing abrasives and will quickly overheat if the pump is run without filling the pump chamber with water before starting the engine. Honda trash pumps contain silicone carbide mechanical seals, designed to withstand abrasive conditions.

## Flow Rate

The flow rate is the maximum amount of water that can be pumped to a given height. A pump's flow rate can be calculated by using a pump performance curve, as shown in the WB 20 example below. If you know the maximum elevation you will be pumping to, you can plot the value on the curve and determine if the pump has a sufficient flow rate for your requirements.

## Elevation Height

The relevance of elevation height depends on the application itself. Elevation height is calculated by:

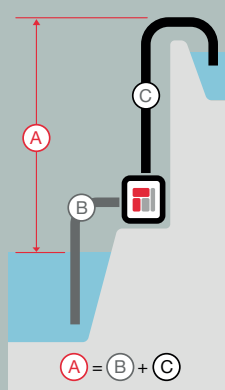

### SUCTION HEAD (B)

The height between the source water level and the water pump.

+

### DISCHARGE HEAD (C)

The height between the water pump and the highest point of the output pipe.

+

### HEAD LOSS


The resistance of the pipes. Longer, narrower and twisted pipes create more loss.

=

### TOTAL HEAD (A)

The total vertical height the pump can lift and discharge.

## PUMP PERFORMANCE CURVE

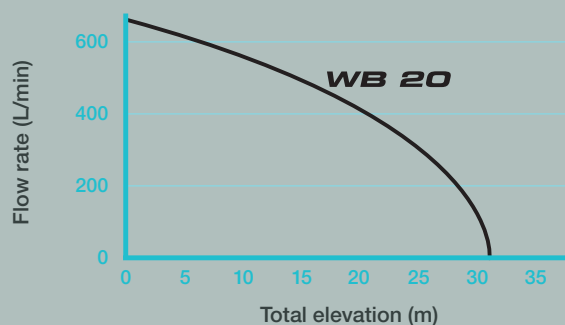

OHV  
4-Stroke  
Engine

Unique 360°  
Operation\*

Lightweight\*\*

Oil Alert\*\*\*

Cast Iron  
Volute and  
Impeller ▲

Enhanced  
Anti-Vibration  
System\*



\*WX 10 model only.

\*\*WX 10 and WX 15 models only.

\*\*\*WX 15T, WH 15 and WH 20 models only.

▲WH 15 and WH 20 models only.

WH 20 model only.



## High pressure performance in a compact size

The lightweight WX and portable WH ranges are capable of generating impressive pressure, making them ideal for sprinkling, jetting, long-hose irrigation or firefighting applications.



*Starting from 6.1kg, the WX range is very convenient to carry*



*The WH range offers up to 5 bars pressure, ideal to transport water long distances*

### Lightweight WX range

The WX range is lightweight (from 6.1kg), compact and easy to transport, with a convenient carry handle. The WX 10 has been designed to allow 360° operation making it ideal for sprinkling, jetting, long hose irrigation or firefighting applications. The durable Honda GX series commercial grade engine ensures easy starting and provides ample power for the toughest conditions.

### WH range: Water cannons

They may be compact in size but they have an impressive high pressure capacity (up to 5 bars). The WH products are able to transport high quantities of water for long distances. The combination of rigid-mount cast iron volute, which reduces case wear, and the reliable Honda GX engines, ensures our products last a long time. The WH 20 is fitted with a frame and rubber mount to reduce mechanical stress absorbing vibration.

## Water pumps lightweight & high pressure performance pumps



WX 10



WX 15



WH 15



WH 20



### SPECIFICATION

WX 10	WX 15	WH 15	WH 20
MAX OUTPUT	MAX OUTPUT	MAX OUTPUT	MAX OUTPUT
7.2m <sup>3</sup> /h	16.8m <sup>3</sup> /h	22.2m <sup>3</sup> /h	27.0m <sup>3</sup> /h
PRESSURE	PRESSURE	PRESSURE	PRESSURE
3.7 bar	4.0 bar	4.0 bar	5.0 bar
DEBRIS SIZE	DEBRIS SIZE	DEBRIS SIZE	DEBRIS SIZE
5.7mm	5.7mm	3.0mm	3.0mm
WEIGHT	WEIGHT	WEIGHT	WEIGHT
6.1kg	9.1kg	22.0kg	27.0kg

OHV  
4-Stroke  
Engine

Oil Alert™

Anti-Vibration  
System

Cast Iron  
Volute and  
Impeller\*

High-  
Efficiency  
Impeller\*

Chemical  
Pump\*\*



\*WB 20 and WB 30 models only.

\*\*WMP 20 only.



## Fast pumping machines

**These water pumps excel in discharging large amounts of water quickly and easily, specially designed to work with salted water, agricultural fertiliser or industrial waste.**

### High flow rate water pumps

Designed with an abrasion-resistant cast iron volute and impeller, WB units have specially designed vanes for a larger discharge capacity, they can move up to 1100 litres a minute. That's enough capacity to clear a medium size swimming pool in an hour and a half. The debris size capacity allows them to deal with gravel and other suspended debris.

### WMP built for strength

Our chemical pump's housing, volute and impeller are all made of reinforced thermoplastic which gives top-class chemical resistance. Seals are made of very specific rubber materials, resistant to a wide range of abrasive materials and ensures a long working life.

### Performance

Featuring the incredibly reliable Honda 4-Stroke engine, this model provides easy starting in all conditions with automatic decompression to reduce the pull-force needed. It's also very efficient, emitting fewer emissions than a regular 2-Stroke engine and provides lower noise levels.




*The WMP 20 can deal with abrasive chemical liquids through very special pump casing*



*The WB range are fitted with a 4 vane high efficiency impeller*

## Water pumps high flow rate & chemical pumps

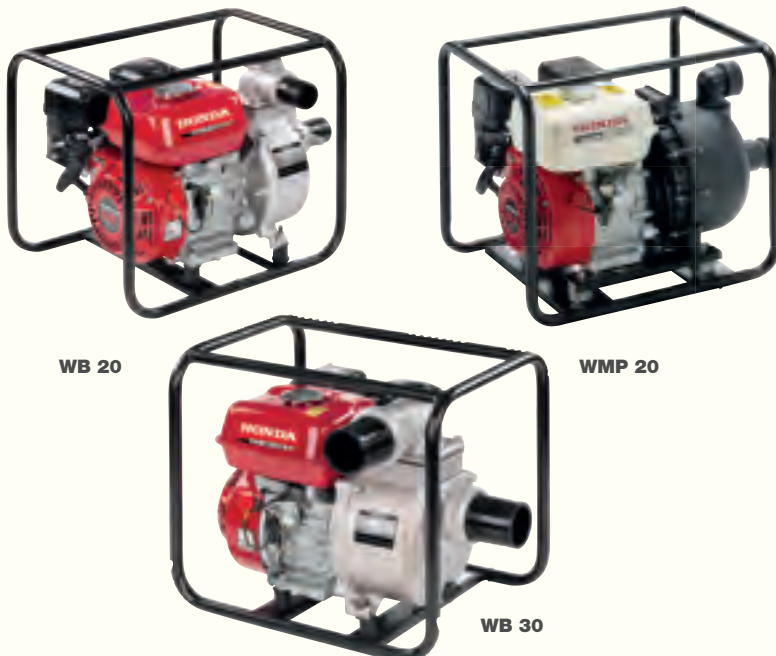

### SPECIFICATION

WMP 20	WB 20	WB 30
MAX OUTPUT	MAX OUTPUT	MAX OUTPUT
50.0m <sup>3</sup> /h	37.2m <sup>3</sup> /h	66.0m <sup>3</sup> /h
PRESSURE	PRESSURE	PRESSURE
2.5 bar	3.2 bar	2.3 bar
DEBRIS SIZE	DEBRIS SIZE	DEBRIS SIZE
5.7mm	6.0mm	6.0mm
WEIGHT	WEIGHT	WEIGHT
25.5kg	20.0kg	26.0kg

OHV  
4-Stroke  
Engine

Oil Alert™

Cast Iron  
Volute And  
Impeller

Conical  
Impeller

Enhanced  
Anti-Vibration  
System

Removable  
Inspection  
Cover



## The tough choice

**Our trash pumps range is ideal for messy jobs and dirty water. It has been developed to handle high volumes of water filled with solids.**



*The removable inspection cover allows quick simple access*

### High debris size absorption

The Honda WT trash range water pump has been designed to allow solids such as sticks, gravel and other suspended debris to flow through the 31mm diameter pump, without clogging or causing damage. This makes them the ideal water pump for heavy duty construction and waste work.

### Superior durability

To cope with highly abrasive sands and aggregates, this pump also features a super-durable silicon carbide seal and cast iron impeller and volute. Our unique anti-vibration, 45° inclined rubber engine mounts extend durability further still, reducing vibration and stress to the frame and of course, cutting down on noise levels.



*High output capacity means the WT 40 can clear up to 1600 l/min*

### Outstanding output capacity

Our trash pumps are fitted with powerful Honda GX engines, which are robust and efficient and have been built to take on the most demanding jobs. They also feature a unique conical shape impeller design, offering a strong maximum output capacity of up to 1600 l/min for the WT 40 model.

Water pumps  
trash pumps



WT 20



WT 30



WT 40



SPECIFICATION

WT 20	WT 30	WT 40
MAX OUTPUT	MAX OUTPUT	MAX OUTPUT
42.0m <sup>3</sup> /h	72.0m <sup>3</sup> /h	96.0m <sup>3</sup> /h
PRESSURE	PRESSURE	PRESSURE
2.5 bar	2.5 bar	2.5 bar
DEBRIS SIZE	DEBRIS SIZE	DEBRIS SIZE
24.0mm	28.0mm	31.0mm
WEIGHT	WEIGHT	WEIGHT
47.0kg	61.0kg	78.0kg

# Water pump specification

Use our handy table to compare our water pumps to choose the right one for you.

## LIGHTWEIGHT AND HIGH PRESSURE PUMPS

WX 10



WX 15

WH 15<sup>°</sup>WH 20<sup>°\*</sup>

	WX 10	WX 15	WH 15 <sup>°</sup>	WH 20 <sup>°*</sup>
Maximum discharge capacity (L/min)	120	280	370	450
Maximum output (m³/h)	7.2	16.8	22.2	27.0
Inlet/outlet diameter mm/inches - thread type	25/1.0-PF	40/1.5-PF	40/1.5-PF	50/2.0-PF
Maximum total head (m)	37	40	40	50
Maximum suction head (m)	8.0	8.0	8.0	8.0
Pressure (bars)	3.7	4.0	4.0	5.0
Debris size capacity (mm)**	5.7	5.7	3.0	3.0
Engine model	GX25	GXH50	GX120	GX160
Engine type	4-Stroke, OHV***, 1 cylinder	4-Stroke, OHV***, 1 cylinder	4-Stroke, OHV***, 1 cylinder	4-Stroke, OHV***, 1 cylinder
Displacement (cm³)	25	49	118	163
Bore x stroke (mm)	35.0 x 26.0	41.8 x 36.0	60.0 x 42.0	68.0 x 45.0
Engine speed (rpm)	7000 max	7000 max	3600 max	3600 max
Engine net power (kW) (SAE J1349)	0.72	1.60	2.60	3.60
Cooling system	Forced air	Forced air	Forced air	Forced air
Ignition system	Transistor	Transistor	Transistor	Transistor
Oil capacity (L)	0.08	0.25	0.56	0.58
Fuel tank capacity (L)	0.53	0.77	2.00	3.10
Operating time at maximum discharge	54m	54m	1h 30	1h 30
Starter system	Recoil	Recoil	Recoil	Recoil
Length (mm)	340	355	415	520
Width (mm)	220	275	360	400
Height (mm)	295	375	415	460
Dry weight (kg)	6.1	9.1	22.0	27.0
Sound pressure level at operator's ears – dB(A) (98/37/EC, 2006/42/EC)	87	90	87	91
Guaranteed sound power level – dB(A) (2000/14/EC, 2005/88/EC)	100	104	104	106

Note: all Honda water pumps run on unleaded petrol.

<sup>°</sup>PF threads are functionally interchangeable with BSPP.







\*Frameless option available.

\*\*Debris size shown is guide only. Pumps are not designed to pump debris continuously, take caution when pumping water that may include solids.

\*\*\*OHV – Overhead Valve.




## HIGH FLOW RATE, TRASH AND CHEMICAL PUMPS

WMP 20	WB 20°	WB 30°	WT 20°	WT 30°	WT 40°
					
833	620	1100	700	1200	1600
50.0	37.2	66.0	42.0	72.0	96.0
50/2.0-NPT	50/2.0-PF	80/3.0-PF	50/2.0-PF	80/3.0-PF	100/4.0-PF
25	32	23	26	25	25
8.0	7.5	7.5	8.0	8.0	8.0
2.5	3.2	2.3	2.6	2.5	2.5
5.7	6.0	6.0	24.0	28.0	31.0
GX160	GX120	GX160	GX160	GX270	GX390
4-Stroke, OHV***, 1 cylinder	4-Stroke, OHV***, 1 cylinder	4-Stroke, OHV***, 1 cylinder	4-Stroke, OHV***, 1 cylinder	4-Stroke, OHV***, 1 cylinder	4-Stroke, OHV***, 1 cylinder
163	118	163	163	270	389
68.0 x 45.0	60.0 x 42.0	68.0 x 45.0	68.0 x 45.0	77.0 x 58.0	88.0 x 64.0
3600 max	3600 max	3600 max	3600 max	3600 max	3600 max
3.60	2.60	3.60	3.60	6.30	8.70
Forced air	Forced air	Forced air	Forced air	Forced air	Forced air
Transistor	Transistor	Transistor	Transistor Magneto	Digital CDI	Digital CDI
0.58	0.56	0.58	0.58	1.10	1.10
3.10	2.00	3.10	3.10	5.30	6.10
1h 30	1h 42	1h 54	1h 30	1h 30	1h 30
Recoil	Recoil	Recoil	Recoil	Recoil	Recoil
520	490	510	620	660	735
400	365	385	460	495	535
450	420	455	465	515	565
25.5	20.0	26.0	47.0	61.0	78.0
89	88	89	92	95	96
105	102	103	106	110	112

## WATER PUMP PERFORMANCE

The colour-coded performance curves below show a direct comparison between the different water pumps. Each individual curve represents the flow rate vs. total elevation performance for each water pump.


### LIGHTWEIGHT AND HIGH PRESSURE PUMP PERFORMANCE CURVES

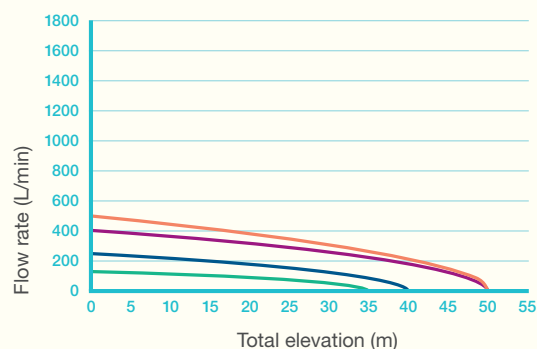

Product key:

**WX 10** **WX 15** **WH 15** **WH 20**

### HIGH FLOW RATE, TRASH AND CHEMICAL PUMP PERFORMANCE CURVES

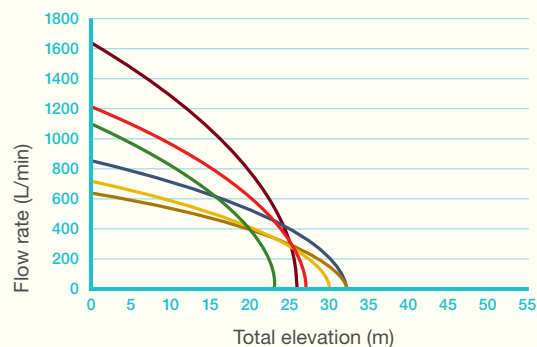

Product key:

**WB 20** **WB 30** **WMP 20**  
**WT 20** **WT 30** **WT 40**

## Power carriers



### SPECIFICATION

#### HP 500

MAX LOAD

**500kg**

MAX UPWARD  
GRADIENT

**25°**

MAX FORWARD  
SPEED

**4.3 km/h**

TRANSMISSION

**Hydrostatic**



HP 500



Images for illustration purposes only.  
Model availability is dependant on country, do not hesitate to ask your local Honda dealer.

*Our power carriers are flexible – simply  
adjust the bed for different sized materials*

Hydrostatic  
DriveUnique  
Track PatternDeadman's  
ClutchSteering  
ClutchesAdjustable  
Load BedTilting  
Load Bed

## Time and labour saver

**Our power carriers take the backache out of shifting heavy loads in confined spaces and inaccessible work areas. The HP 500 provides unbeatable traction and manoeuvrability over all types of terrain including inclines and declines of up to 25°.**

### High traction performance

Across gravel, bumps and even up stairs, our power carriers' unique track tread provides incredible traction. They have great manoeuvrability and the uniquely designed tread also minimises ground damage, which is important when working across lawns and gardens.

### Smooth control

Powered by the efficient, easy starting Honda 4-Stroke GX160 OHV engine, the Honda power carrier HP 500 is easy to operate with simple and conveniently located controls. The machine is fitted with steering clutches which allow you to perform U-Turns effortlessly even in

the tightest spaces. The hydrostatic transmission provides a smooth, variable speed control, which allows you to work at your own pace.

### Versatile load bed

The Honda power carrier has the flexibility of an adjustable load bed. So whatever the shape and size of the load - breeze blocks, agricultural material or rubble, the bed can be changed to accommodate them. It also has the added benefit of a tilting bed, which makes depositing cargo easy. So there's no lifting from the machine to the floor.



*The HP 500 power carrier has traction, even on a slope*



*Hydrostatic transmission offers great ease of use*

# World of Honda Power Equipment

For years, we've built our Power Equipment range around our clean Honda 4-Stroke engine technology. That's because we're committed to making our products as user-friendly, fuel-efficient and reliable as we can - all without compromising performance. Class-leading 4-Stroke principles still drive many of our products, but we're always pushing.





You deserve complete confidence that you've made the right choice, long after you've made the purchase. That's why we appoint our Honda Authorised Dealers with as much care as we build into our products.

Look for the seal of quality when you buy your Honda, or call **0845 200 8000\*** and we'll find the closest to you.



### Sales

Our Authorised Dealers not only feature a comprehensive display of Honda products to see and touch, but they know our product range inside-out. Every one follows an extensive Honda training programme with regular refresher courses – so you can trust in their valuable advice and experience to help you choose the product that's just right for you and your needs.



### Service

As well as offering the highest levels of after-sales service, our Authorised Dealers' factory-trained technicians perform a full Pre-Delivery Inspection (PDI) on every machine, and are fully equipped to keep your product in peak condition with cost-effective servicing. Of course, you can also be assured that only high quality, genuine Honda parts are used, with access to our 24hr parts delivery service for fast and efficient turnaround.



### Expertise

Our Authorised Dealers are true experts in their field, often with years of first-hand experience under their belt. In fact, their knowledge and experience plays an important role in making sure that our Research and Development team is given feedback from our customers, so we can ensure that new and improved models continue to meet your future needs too.

## Unrivalled quality, for peace of mind.

There's a simple reason why you'll see so many old Honda products still in use. **Ours are built better to last longer.**

That's not just an idle promise. It's fact. Our enviable reputation for durability and reliability is supported by our cast-iron 5 Year Warranty\*\* for domestic use and one year for professional use, covering both parts and labour.

Our warranty maintains the same value throughout its lifetime too – meaning the last day of the cover is exactly the same as day one: solid and dependable. With Honda Power Equipment, reliability comes as standard.

Generator	Water Pump	Generator & Water Pump
<b>5</b>	<b>2</b>	<b>1</b>
Year Warranty**	Year Warranty	Year Warranty
HONDA	HONDA	HONDA
Domestic Use	Domestic Use	Professional Use

\*Charged at local rates from landlines. \*\*Subject to an annual service.